


# Denka DL22N

Quick, simple, effective.



- Excellent gradeability for working on slopes
- Very flexible setup due to multi-position outriggers
- Compact transport dimensions - will fit through a single doorway

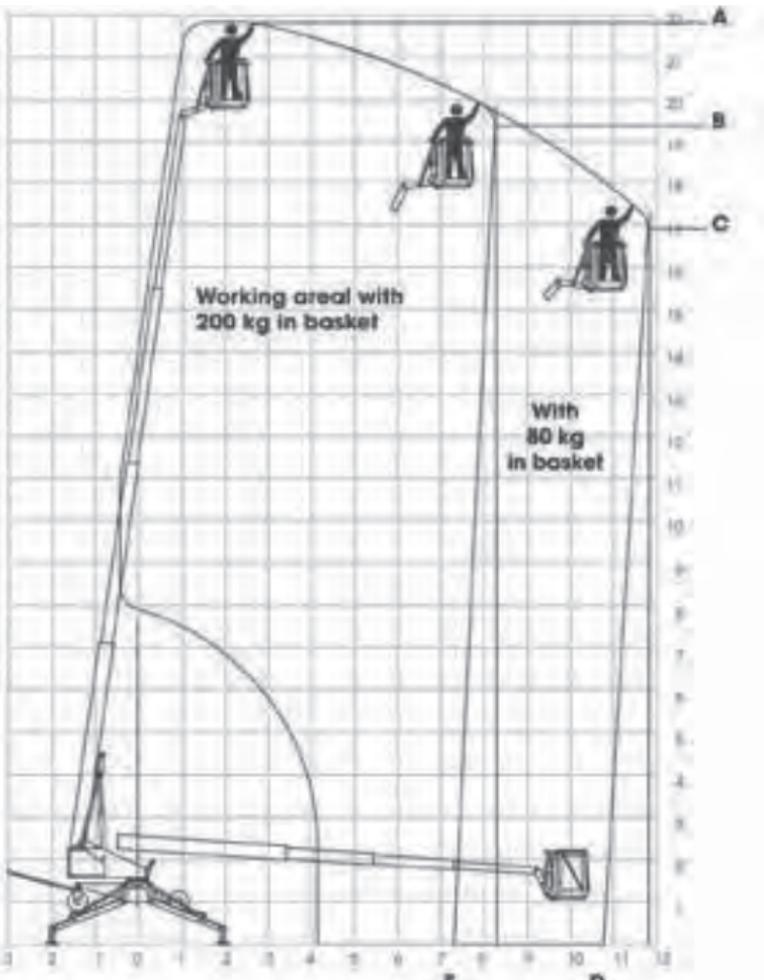

**HigherAccess**  
Spider Lift Hire Specialists

08456 044 054 [www.higheraccess.co.uk](http://www.higheraccess.co.uk)

# Denka DL22N

Working height (max.)	21.9m
Platform height (max.)	19.9m
Lateral outreach (max.)	11.8m
Safe load on cage (max.)	200kg
Cage rotation	120°
Range of rotation	360°
Limited range of rotation - one side narrow	Restricted outreach only
Limited range of rotation - both sides narrow	Restricted outreach only
Cage dimensions (lxwxh)	1160x680x-1300mm
Removable cage	Y
Length in travelling position with cage (min.)	5825mm
Length in travelling position without cage (min.)	6525mm
Width in travelling position with cage (min.)	1195mm
Width in travelling position without cage (min.)	890mm
Height in travelling position (min.)	2140mm
Net weight	2300kg
Setup width - standard - to outside edge of outrigger foot	4600mm
Setup length - standard - to outside edge of outrigger foot	4600mm
Setup width - one side narrow - to outside edge of outrigger foot	3400mm
Setup width - both sides narrow - to outside edge of outrigger foot	3400mm
Power supply	110V
Climbing ability	21%
Setup ability	21%
Maximum point load (N)	
Load on 400mm pad (N/cm <sup>2</sup> )	
Load on 600mm pad (N/cm <sup>2</sup> )	
Load on 800mm pad (N/cm <sup>2</sup> )	
Live load in setup position (KN/m <sup>2</sup> )	1.342
Traffic live load (KN/m <sup>2</sup> )	3.885
Adjustable track height/width	NA
Drive control	Steering handle
Drive Control	Radio remote control
Drive Speed	1.60km/h

## DISCLAIMER

The information on this page is for guidance only and is subject to change without prior notice in line with the Manufacturer's Development Program. Higher Access and its suppliers cannot be held liable for any damage or injury sustained through use of this information to specify equipment.