


HALEO30T+

Unrivalled envelope and safe working load



- Maximum 400kg safe working load
- Anti-entrapment as standard
- Coming home and memory functions

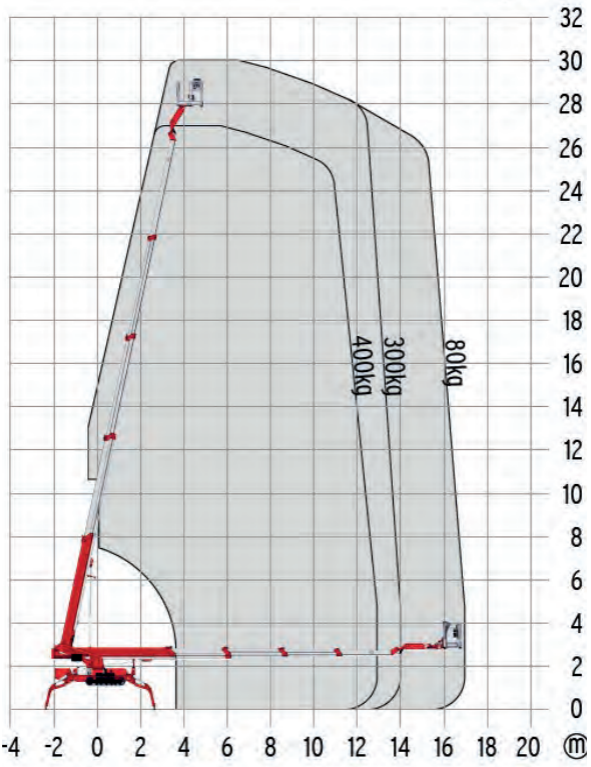

HigherAccess
Spider Lift Hire Specialists

08456 044 054 www.higheraccess.co.uk

HALEO30T+

Working height (max.) (m)	30.0m w. 300kg, 27.0m w. 400kg
Lateral outreach (max.) (m)	17.00
Safe load on cage (max.) (m)	400
Cage rotation	180°
Range of rotation	450°
Range of rotation - one side narrow	450°
Safe working load - one side narrow (kg)	300
Working height - one side narrow (m)	27.00
Range of rotation - both sides narrow	450°
Safe working load - both sides narrow (kg)	250
Working height - both sides narrow (m)	25.00
Cage dimensions (m)	1.2 x 0.8 x 1.1
Removable cage	Y
Length in travelling position with cage (m)	7.70
Length in travelling position without cage (m)	7.50
Width in travelling position with cage (m)	1.58
Width in travelling position without cage (m)	1.58
Height in travelling position (m)	1.98
Net weight (kg)	4,500
Setup width standard (m)	5.51
Setup length standard (m)	5.60
Setup width - one side narrow (m)	4.30
Setup width - both sides narrow (m)	2.99
Power supply	Diesel
	110v
	240v
Climbing ability	17°
Setup ability	21°
Maximum point load (kN)	32.00
Load on 400mm pad (kN/m ²)	200.00
Load on 600mm pad (kN/m ²)	88.89
Load on 800mm pad (kN/m ²)	50.00
Adjustable track height/width	Y
Drive control	Radio remote
Drive speed	3.0km/h

DISCLAIMER

The information on this page is for guidance only and is subject to change without prior notice in line with the Manufacturer's Development Program. Higher Access and its suppliers cannot be held liable for any damage or injury sustained through use of this information to specify equipment.