


HAS15

Simple functionality indoors or out.



- Dual power source - 110V or 230V electric or diesel - can work indoors or out
- Simple controls, with a 4 step operating process from folded up to working at height
- Unrivalled compact transport dimensions will fit through a single doorway

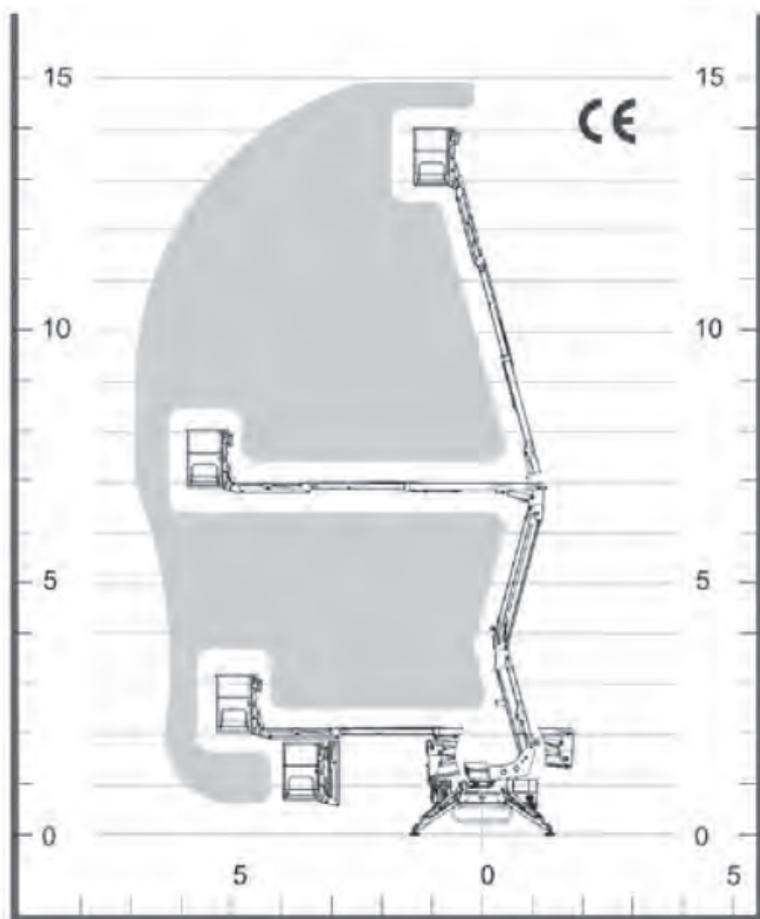

HigherAccess
Spider Lift Hire Specialists

08456 044 054 www.higheraccess.co.uk

HAS15

Working height (max.)	15.0m
Platform height (max.)	13.0m
Lateral outreach (max.)	7.0m
Safe load on cage (max.)	200kg
Cage rotation	N/A
Range of rotation	356°
Limited range of rotation - one side narrow	N/A
Limited range of rotation - both sides narrow	N/A
Cage dimensions (lxwxh)	1400x700x-1100mm
Removable cage	Y
Length in travelling position with cage (min.)	4148mm
Length in travelling position without cage (min.)	3420mm
Width in travelling position with cage (min.)	1270mm
Width in travelling position without cage (min.)	780mm
Height in travelling position (min.)	1897mm
Net weight	2000kg
Setup width - standard - to outside edge of outrigger foot	3100mm
Setup length - standard - to outside edge of outrigger foot	3100mm
Setup width - one side narrow - to outside edge of outrigger foot	N/A
Setup width - both sides narrow - to outside edge of outrigger foot	N/A
Power supply - Kubota Diesel	230V/110V
Climbing ability	17°
Setup ability	7°
Maximum point load (kN)	12.00
Load on 400mm pad (kN/m ²)	75.00
Load on 600mm pad (kN/m ²)	33.33
Load on 800mm pad (kN/m ²)	18.77
Adjustable track height/width	780mm - 1170mm
Drive control	Umbilical remote control
Drive Control	Umbilical remote control
Drive Speed	1.60km/h

DISCLAIMER

The information on this page is for guidance only and is subject to change without prior notice in line with the Manufacturer's Development Program. Higher Access and its suppliers cannot be held liable for any damage or injury sustained through use of this information to specify equipment.